



Management
System
EN ISO
13485:2016
www.tuv.com
ID 0000075020

Skot Fluoroscopy

FLUOROSCOPY STRETCHER

Regulation
(EU) 2017/745 |



■ A UNIQUE DESIGN COMBINING THE SAFETY OF AN IMAGING TABLE AND THE MOBILITY OF A STRETCHER ■



Retractable radiolucent surface that allows imaging without repositioning the patient



ERGONOMICS

400 mm translation movement with a locking system of the upper stretcher plate



SAFETY

Velcro-free mattress with anti-infiltration system



HYGIENE

5th directional retractable wheel and barriers folding both forwards and backwards



HANDLING

Characteristics

Overall width: 860 mm
Overall length: 2270 mm

Variable height: 595 to 980 mm
Lying width: 720 mm
Lying length: 2,000 mm

Backrest: 0° to 85°
Anti-Trend./Trendelenburg: +10°/-10°

Wheels: Ø200 mm with central locking

Upholstery thickness: 80 mm

Maximum load : 240 kg

STANDARD

White epoxy steel frame
4 wheels omnidirectional ø200 mm
+ 5th retractable directional wheel
Centralised braking (2 pedals)
Vinyl mattress 8 cm M1
4 anti-shock bumpers Ø130 mm
4 IV pole supports
2 "Perfect Transfer" retractable barriers
Gas lift
4 retractable push handles
Table on electric jacks
4A Battery

Retractable handles at head and feet ends



OPTIONS (non-exhaustive list, contact us)

Telescopic IV pole


Vice rails (pair)

Ultra-comfort mattress with anti-slip underside (11 cm thick)

Transfer mattress (4 or 8 cm thick)

10A battery

Available in a hydraulic version + gas lift table.
Same options except for the battery.

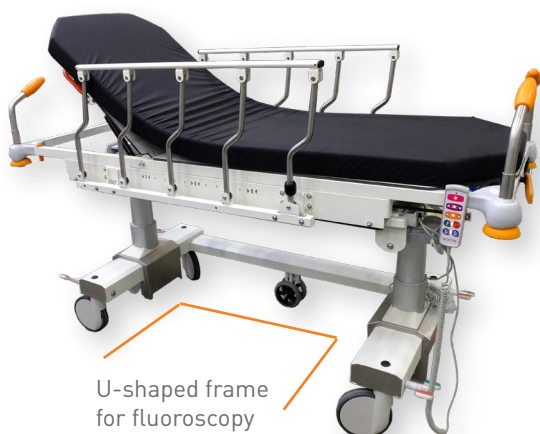

U-shaped frame for fluoroscopy



Hydraulic version